


Secure life with **KCE**
GIMBAL DOME CAMERA



KCE-8845-E / KCE-8845W-E

Gimbal Dome Camera with Built-in Vari-focal Lens

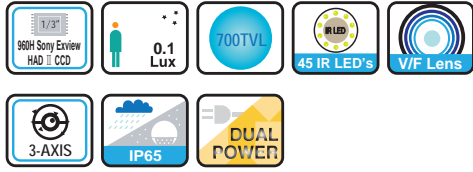

- 1/3" 960H Sony EXview HAD II CCD
- 0.1Lux at F1.2
- Super High Resolution 700TV Lines
- 2.8~12mm Varifocal Lens
- Vandal Proof Housing
- Cable Management Bracket KCEDB-104 (optional)
- Dual Voltage DC12V/ AC24V
- 3-Axis Mounting Capabilities
- IP66 rated for weather proof



Specification

DESCRIPTION	NTSC	PAL
Image Sensor	1/3" 960H Sony EXview HAD II CCD	
Effective Pixels	976(H) x 494(V)	976(H) x 582(V)
Scanning System	2:1 Interlace	
Synchronization	Internal	
Horizontal Resolution	700TV Lines	
Video Output	CVBS : 1.0Vp-p, 75Ω composite	
S/N (Y Signal)	52dB (AGC off)	
Min. Illumination	0.1 Lux at F1.2	
3Axis	Yes	
Lens	2.8~12mm Varifocal Lens	
Electronic Shutter	AUTO (1/60-1/10,000sec)	AUTO (1/50-1/10,000sec)
Backlight Compensation	AUTO	
White Balance	ATW	
AGC	AUTO	
Day&Night	AUTO	
IR LED	45 EA	
Input Voltage	DC 12V(±10%) / AC 24V Dual Voltage	
Power Consumption	IR OFF : 250mA(max) / IR ON : 550mA at DC 12V POWER IR OFF : 170mA(max) / IR ON : 450mA at AC 24V POWER	
Operating Temp. / Hum.	-10°C ~ +50°C / 30% ~ 80% RH	
Storage Temp. / Hum.	-20°C ~ +60°C / 20% ~ 90% RH	

Dimension

Unit : mm

